

STAR MICROWAVE, INC. ELECTRICAL DATA SHEET


29 Apr 2004 08:28:55

CH1 LOG .2 dB/ REF -.3 dB
 S21 2:-.11860 dB 2 700.000 000 MHz

CH2 LOG 5 dB/ REF -21 dB
 S12 2:-30.882 dB 2 700.000 000 MHz

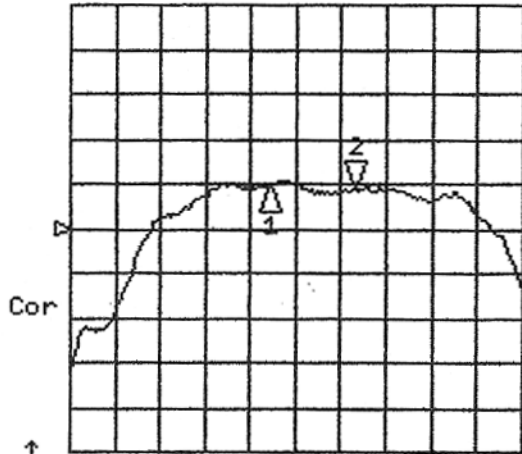


CH1 Markers
 1:-.11180 dB
 2:2.55000 GHz

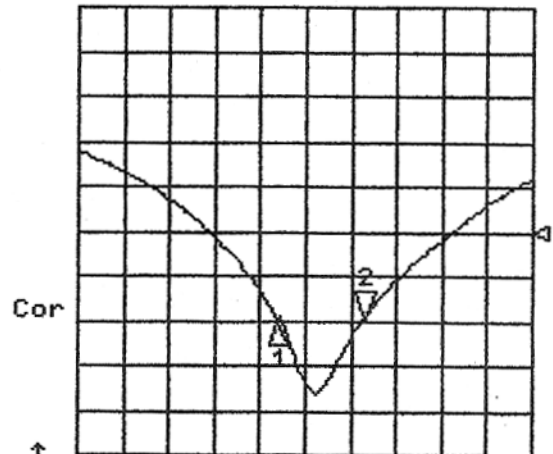


CENTR 2600.000 MHz SPAN 800.000 MHz
 START 2200.000 MHz STOP 3000.000 MHz

CH3 LOG 5 dB/ REF -21 dB
 S11 2:-29.335 dB 2 700.000 000 MHz

CH4 LOG 5 dB/ REF -21 dB
 S22 2:-32.213 dB 2 700.000 000 MHz

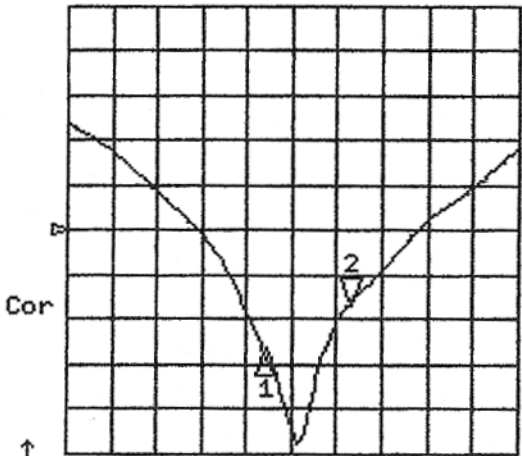

CH3 Markers
 1:-34.435 dB
 2:2.55000 GHz

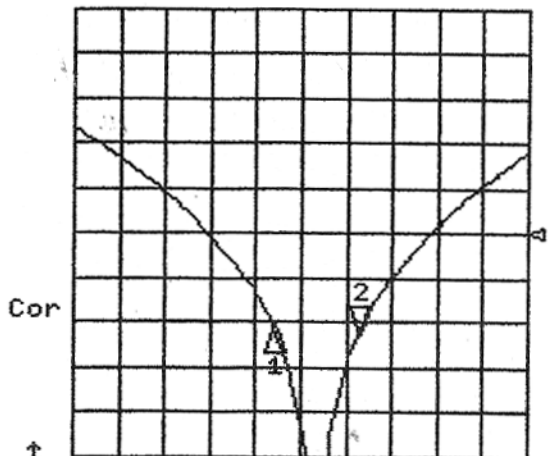

CENTR 2600.000 MHz SPAN 800.000 MHz

START 2200.000 MHz STOP 3000.000 MHz

Temp:	+25° C	Lot No.	
Job No.		Tested By	
Model No.	ETI0260-A3L	Date	
Serial No.	1215	Q.A.	
		Date	

